


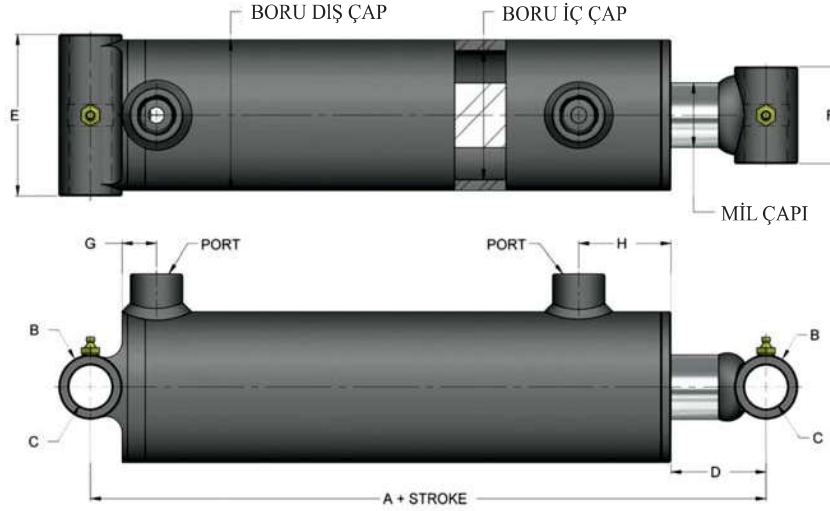

PARÇA NUMARASI	BORU İÇ ÇAP	BORU DIŞ ÇAP	MİL ÇAPI	A	B	C	D	E	F	G	H	BAĞLANTI NOKTALARI
BU15XX-S	1.50"	1.875"	1.00"	8.00"	1.25"	0.76"	2.62"	2.25"	2.00"	1.06"	1.87"	SAE 4
BU20XX-S	2.00"	2.375"	1.25"	8.00"	1.50"	1.01"	2.25"	2.75"	2.25"	1.00"	2.06"	SAE 6
BU25XX-S	2.50"	2.875"	1.50"	8.00"	1.50"	1.01"	2.25"	3.25"	2.25"	0.81"	2.18"	SAE 8
BU30XX-S	3.00"	3.50"	1.50"	8.00"	1.50"	1.01"	2.25"	3.75"	2.25"	0.81"	2.18"	SAE 8
BU35XX-S	3.50"	4.00"	1.75"	10.00"	2.00"	1.26"	4.00"	4.25"	2.25"	0.81"	2.18"	SAE 8
BU40XX-S	4.00"	4.50"	2.00"	10.00"	2.25"	1.51"	3.75"	4.75"	2.50"	0.81"	2.18"	SAE 8
BU50XX-S	5.00"	5.50"	2.50"	12.00"	3.00"	**1.76"	3.50"	5.75"	3.25"	1.25"	2.75"	SAE 12

TEKNİK ÖLÇÜLER


PARÇA NUMARASI	SİL. ÇAP & STROKE	BOYUTLAR		MİL ÇAP	DIŞ ÖLÇÜSÜ	BAĞLANTI NOKTALARI	SİL. İTME KUVVETİ (KG)	BASINÇ (psi)	AĞIRLIK (kg)
		SİL. KAPALI	SİL. AÇIK						
BU1504-S	1.5" X 4"	12"	16"	1"	3/4"	SAE 4	2410	3000	3.63
BU1506-S	1.5" X 6"	14"	20"				2410	3000	4.09
BU1508-S	1.5" X 8"	16"	24"				2410	3000	4.54
BU1510-S	1.5" X 10"	18"	28"				2410	3000	5.45
BU1512-S	1.5" X 12"	20"	32"				2410	3000	5.90
BU1514-S	1.5" X 14"	22"	36"				2410	3000	6.36
BU1516-S	1.5" X 16"	24"	40"				2410	3000	6.81
BU1518-S	1.5" X 18"	26"	44"				2182	2700	7.72
BU1520-S	1.5" X 20"	28"	48"				2182	2300	8.18
BU1524-S	1.5" X 24"	32"	56"				1365	1700	9.09
BU2004-S	2" X 4"	12"	16"	1-1/4"	1"	SAE 6	4275	3000	5.45
BU2006-S	2" X 6"	14"	20"				4275	3000	5.90
BU2008-S	2" X 8"	16"	24"				4275	3000	6.81
BU2010-S	2" X 10"	18"	28"				4275	3000	7.72
BU2012-S	2" X 12"	20"	32"				4275	3000	8.63
BU2014-S	2" X 14"	22"	36"				4275	3000	9.09
BU2016-S	2" X 16"	24"	40"				4275	3000	10.00
BU2018-S	2" X 18"	26"	44"				4275	3000	10.90
BU2020-S	2" X 20"	28"	48"				4275	3000	11.36
BU2024-S	2" X 24"	32"	56"				16060	2300	13.18
BU2028-S	2" X 28"	36"	64"				2545	1700	14.54
BU2030-S	2" X 30"	38"	68"				2228	1500	15.45
BU2032-S	2" X 32"	40"	72"				2000	1400	15.90
BU2036-S	2" X 36"	44"	80"				1590	1100	17.72
BU2040-S	2" X 40"	48"	88"				1320	900	19.09
BU2048-S	2" X 48"	56"	104"				955	600	22.27

*** NPT portlarında mevcuttur.



HAKBAY
HİDROLİK - Pnömatik

1 inç 2,54 mm'ye eşittir. $\text{mm} = \frac{\text{in}}{0.039370}$
1 psi = 0.069 bar

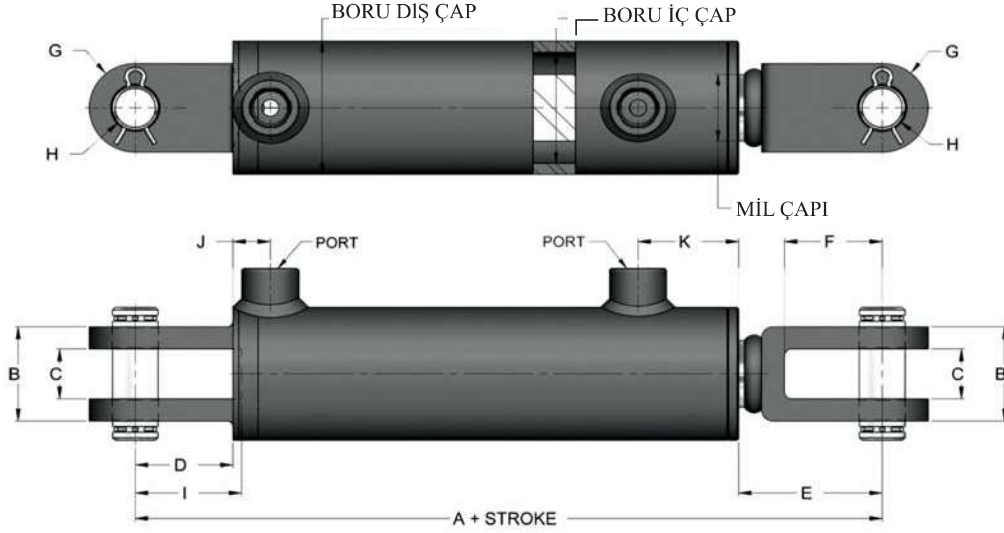


PARÇA NUMARASI	BORU İÇ ÇAP	BORU DIŞ ÇAP	MİL ÇAPI	*A	B	C	D	*E	F	G	H	I	J	K	BAĞLANTI NOKTALARI
CL15-XX-S	1.50"	1.875"	1.00"	8.25"	1.62"	0.87"	1.37"	2.25"	1.37"	1.50"	0.76"	-	0.93"	1.87"	SAE 4
CL20-XX-S	2.00"	2.375"	1.25"	10.25"	2.12"	1.12"	2.12"	3.12"	2.12"	2.00"	1.01"	-	1.00"	2.06"	SAE6
CL25-XX-S	2.50"	2.875"	1.50"	10.25"	2.12"	1.12"	2.12"	3.12"	2.12"	2.00"	1.01"	-	0.81"	2.18"	SAE 8
CL30-XX-S	3.00"	3.50"	1.50"	10.25"	2.12"	1.12"	2.12"	3.12"	2.12"	2.00"	1.01"	-	0.81"	2.18"	SAE 8
CL35-XX-S	3.50"	4.00"	1.75"	10.25"	2.37"	1.12"	2.00"	3.12"	2.12"	2.00"	1.01"	2.12"	0.93"	2.18"	SAE 8
CL40-XX-S	4.00"	4.50"	2.00"	10.25"	2.37"	1.12"	1.75"	3.12"	2.00"	2.00"	1.01"	2.00"	1.06"	2.18"	SAE 8
CL50-XX-S	5.00"	5.50"	2.50"	13.00"	3.12"	1.62"	2.25"	3.62"	2.25"	3.00"	1.51"	-	1.37"	2.75"	SAE 12


TEKNİK ÖLÇÜLER

PARÇA NUMARASI	SİL. ÇAP & STROKE	BOYUTLAR		MİL ÇAPI	DIŞ ÖLÇÜSÜ	BAĞLANTI NOKTALARI	SİL. İTME KUVVETİ (KG)	BASINÇ (psi)	AĞIRLIK (kg)
		SİL. KAPALI	SİL. AÇIK						
CL1504-S	1.5" X 4"	12-1/4"	16-1/4"	1"	3/4"	SAE 4	2410	3000	3,63
CL1506-S	1.5" X 6"	14-1/4"	20-1/4"				2410	3000	4,09
CL1508-S	1.5" X 8"	16-1/4"	24-1/4"				2410	3000	5,00
CL1510-S	1.5" X 10"	18-1/4"	28-1/4"				2410	3000	5,45
CL1512-S	1.5" X 12"	20-1/4"	32-1/4"				2410	3000	5,90
CL1514-S	1.5" X 14"	22-1/4"	36-1/4"				2410	3000	6,36
CL1516-S	1.5" X 16"	24-1/4"	40-1/4"				2410	3000	6,81
CL1518-S	1.5" X 18"	26-1/4"	44-1/4"				2180	2700	7,72
CL1520-S	1.5" X 20"	28-1/4"	48-1/4"				1820	2200	8,18
CL1524-S	1.5" X 24"	32-1/4"	56-1/4"				600	1600	9,09
CL2004-S	2" X 4"	14-1/4"	18-1/4"	1-1/4"	1"	SAE 6	4273	3000	6,36
CL2006-S	2" X 6"	16-1/4"	22-1/4"				4273	3000	7,27
CL2008-S	2" X 8"	20-1/4"	28-1/4"				4273	3000	8,18
CL2010-S	2" X 10"	20-1/4"	30-1/4"				4273	3000	8,63
CL2012-S	2" X 12"	22-1/4"	34-1/4"				4273	3000	9,54
CL2014-S	2" X 14"	24-1/4"	38-1/4"				4273	3000	10,45
CL2016-S	2" X 16"	26-1/4"	42-1/4"				4273	3000	11,36
CL2018-S	2" X 18"	28-1/4"	46-1/4"				4273	3000	11,81
CL2020-S	2" X 20"	30-1/4"	50-1/4"				4137	2900	12,72
CL2024-S	2" X 24"	34-1/4"	58-1/4"				3045	2100	14,09
CL2028-S	2" X 28"	38-1/4"	66-1/4"				2365	1600	15,90
CL2030-S	2" X 30"	40-1/4"	70-1/4"				2090	1400	16,36
CL2032-S	2" X 32"	42-1/4"	74-1/4"				1865	1300	17,27
CL2034-S	2" X 34"	44-1/4"	78-1/4"				1680	1100	18,18
CL2036-S	2" X 36"	46-1/4"	82-1/4"				1545	1000	19,09
CL2040-S	2" X 40"	50-1/4"	90-1/4"				1273	800	20,45
CL2048-S	2" X 48"	58-1/4"	106-1/4"				910	600	23,63

*** NPT portlarında mevcuttur.

1 inç 2,54 mm'ye eşittir. $mm = \frac{in}{0.039370}$
1 psi = 0.069 bar





TEKNİK ÖLÇÜLER


PARÇA NUMARASI	SİL. ÇAP & STROKE	BOYUTLAR		MİL ÇAP	DIŞ ÖLÇÜSÜ	BAĞLANTI NOKTALARI	SİL. İTME KUVVETİ (KG)	BASINÇ (psi)	AĞIRLIK (kg)
		SİL. KAPALI	SİL. AÇIK						
CL2504-S	2.5" X 4"	14-1/4"	18-1/4"	1-1/2"	1"	SAE 8	3037	3000	8
CL2506-S	2.5" X 6"	16-1/4"	22-1/4"				3037	3000	9
CL2508-S	2.5" X 8"	20-1/4"	28-1/4"				3037	3000	11
CL2510-S	2.5" X 10"	20-1/4"	30-1/4"				3037	3000	11
CL2512-S	2.5" X 12"	22-1/4"	34-1/4"				3037	3000	12
CL2514-S	2.5" X 14"	24-1/4"	38-1/4"				3037	3000	13
CL2516-S	2.5" X 16"	26-1/4"	42-1/4"				3037	3000	15
CL2518-S	2.5" X 18"	28-1/4"	46-1/4"				3037	3000	15
CL2520-S	2.5" X 20"	30-1/4"	50-1/4"				3037	3000	16
CL2524-S	2.5" X 24"	34-1/4"	58-1/4"				2232	2800	18
CL2528-S	2.5" X 28"	38-1/4"	66-1/4"				2232	2200	20
CL2530-S	2.5" X 30"	40-1/4"	70-1/4"				1984	1900	21
CL2532-S	2.5" X 32"	42-1/4"	74-1/4"				1777	1700	22
CL2534-S	2.5" X 34"	44-1/4"	78-1/4"				1591	1500	24
CL2536-S	2.5" X 36"	46-1/4"	82-1/4"				1446	1400	25
CL2540-S	2.5" X 40"	50-1/4"	90-1/4"				1062	1100	26
CL2548-S	2.5" X 48"	58-1/4"	106-1/4"				868	800	30
CL3004-S	3" X 4"	14-1/4"	18-1/4"	1-1/2"	1"	SAE 8	4380	3000	10
CL3006-S	3" X 6"	16-1/4"	22-1/4"				4380	3000	11
CL3008-S	3" X 8"	20-1/4"	28-1/4"				4380	3000	12
CL3010-S	3" X 10"	20-1/4"	30-1/4"				4380	3000	13
CL3012-S	3" X 12"	22-1/4"	34-1/4"				4380	3000	14
CL3014-S	3" X 14"	24-1/4"	38-1/4"				4380	3000	15
CL3016-S	3" X 16"	26-1/4"	42-1/4"				4380	3000	16
CL3018-S	3" X 18"	28-1/4"	46-1/4"				4380	3000	18
CL3020-S	3" X 20"	30-1/4"	50-1/4"				3884	2600	19
CL3024-S	3" X 24"	34-1/4"	58-1/4"				2893	1900	21
CL3028-S	3" X 28"	38-1/4"	66-1/4"				2893	1500	23
CL3030-S	3" X 30"	40-1/4"	70-1/4"				1984	1300	24
CL3032-S	3" X 32"	42-1/4"	74-1/4"				1777	1200	25
CL3034-S	3" X 34"	44-1/4"	78-1/4"				1591	1100	26
CL3036-S	3" X 36"	46-1/4"	82-1/4"				1446	900	28
CL3504-S	3.5" X 4"	14-1/4"	18-1/4"	1-3/4"	1"	SAE 8	5950	3000	12
CL3506-S	3.5" X 6"	16-1/4"	22-1/4"				5950	3000	14
CL3508-S	3.5" X 8"	20-1/4"	28-1/4"				5950	3000	16
CL3510-S	3.5" X 10"	20-1/4"	30-1/4"				5950	3000	16
CL3512-S	3.5" X 12"	22-1/4"	34-1/4"				5950	3000	18
CL3514-S	3.5" X 14"	24-1/4"	38-1/4"				5950	3000	19
CL3516-S	3.5" X 16"	26-1/4"	42-1/4"				5950	3000	21
CL3518-S	3.5" X 18"	28-1/4"	46-1/4"				5950	3000	22
CL3520-S	3.5" X 20"	30-1/4"	50-1/4"				5950	3000	24
CL3524-S	3.5" X 24"	34-1/4"	58-1/4"				5373	2700	26
CL3528-S	3.5" X 28"	38-1/4"	66-1/4"				4153	2000	29
CL3530-S	3.5" X 30"	40-1/4"	70-1/4"				3699	1800	30
CL3532-S	3.5" X 32"	42-1/4"	74-1/4"				2975	1600	32
CL3534-S	3.5" X 34"	44-1/4"	78-1/4"				2975	1500	33
CL3536-S	3.5" X 36"	46-1/4"	82-1/4"				2686	1300	35

*** NPT portlarında mevcuttur.

1 inç 2,54 mm'ye eşittir. $\text{mm} = \frac{\text{in}}{0.039370}$
1 psi = 0.069 bar





HAKBAY
HİDROLİK - PNÖMATİK

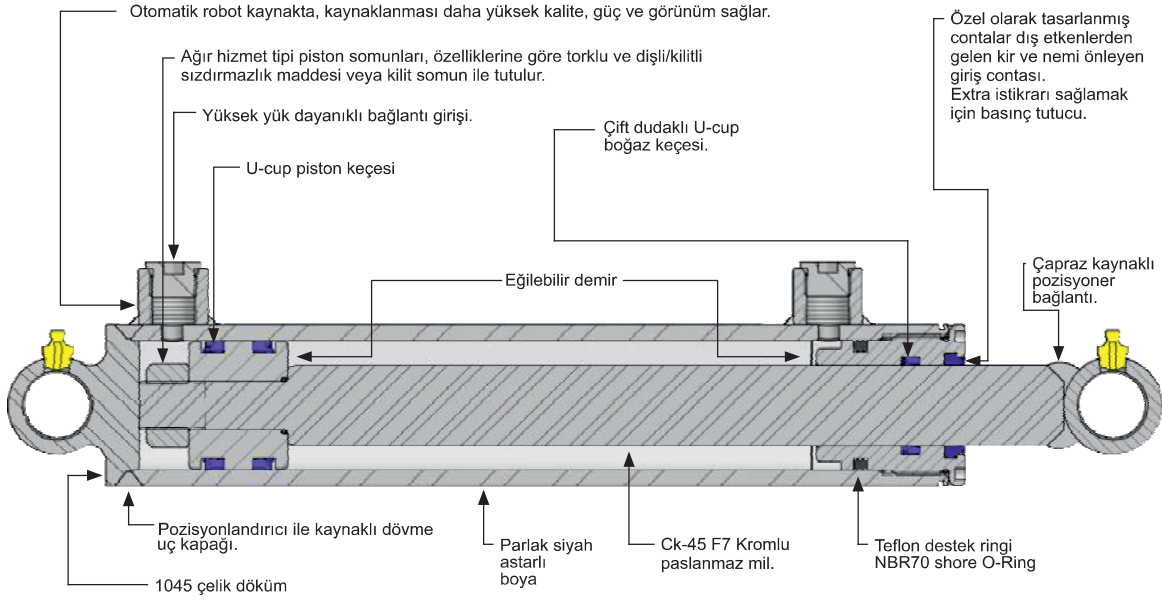


* 5" MODELLER HARİÇ:

KEÇE SICAKLIK ARALIĞI : -30°C / +100°C (-22°F / +212°F)
KEÇE MAKSİMUM HIZI : 3 FT / SEC

TÜM KEÇELER BİRİNCİ SINIF, SİLİNDİRLER STATİK VE DİNAMİK BASINÇ TESTLERİNE UYGUN ÖZELLİKTİR.

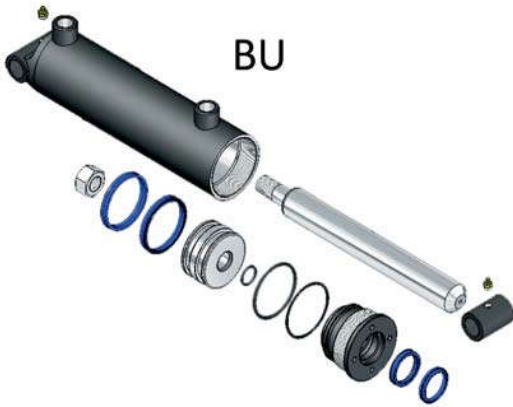

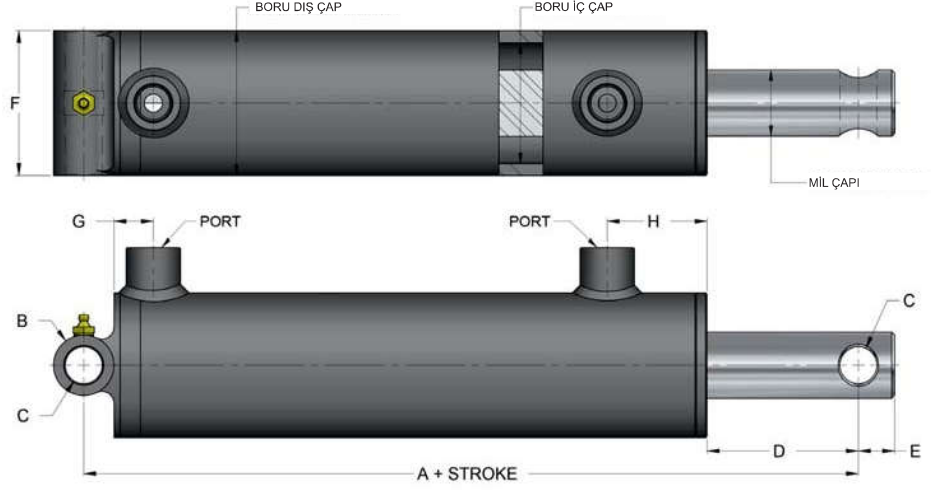

PARÇA NUMARASI	BORU İÇ ÇAP	BORU DIŞ ÇAP	MİL ÇAP	A	B	C	D	E	F	G	H	BAĞLANTI NOKTALARI
WT3-15XX-S	1.50"	1.875"	1.00"	7.00"	1.25"	0.64"	2.43"	0.62"	2.00"	0.81"	1.87"	SAE 6
WT3-20XX-S	2.00"	2.375"	1.25"	8.00"	1.25"	0.76"	3.37"	0.75"	2.50"	0.81"	1.87"	SAE 8
WT3-25XX-S	2.50"	2.875"	1.37"	8.00"	1.25"	0.76"	3.12"	0.75"	3.00"	0.81"	2.06"	SAE 8
WT3-30XX-S	3.00"	3.50"	1.50"	8.00"	1.50"	1.01"	2.56"	1.00"	3.50"	0.81"	2.18"	SAE 8
WT3-35XX-S	3.50"	4.00"	1.75"	8.00"	1.50"	1.01"	2.43"	1.00"	4.00"	0.81"	2.18"	SAE 8
WT3-40XX-S	4.00"	4.50"	2.00"	9.00"	2.00"	1.26"	2.43"	1.25"	4.50"	0.81"	2.18"	SAE 8

TEKNİK ÖLÇÜLER

PARÇA NUMARASI	SİL. ÇAP & STROKE	BOYUTLAR		MİL ÇAP	DIŞ ÖLÇÜSÜ	BAĞLANTI NOKTALARI	SİL. İTME KUVVETİ (KG)	BASINÇ (psi)	AĞIRLIK (kg)
		SİL. KAPALI	SİL. AÇIK						
WT3-1504-S	1.5" X 4"	11"	15"	1"	5/8"	SAE 6	2410	3000	3
WT3-1506-S	1.5" X 6"	13"	19"				2410	3000	4
WT3-1508-S	1.5" X 8"	15"	23"				2410	3000	4
WT3-1510-S	1.5" X 10"	17"	27"				2410	3000	5
WT3-1512-S	1.5" X 12"	19"	31"				2410	3000	5
WT3-1514-S	1.5" X 14"	21"	35"				2410	3000	6
WT3-1516-S	1.5" X 16"	23"	39"				2410	3000	6
WT3-2004-S	2" X 4"	12"	16"	1-1/4"	3/4"	SAE 8	4273	3000	5
WT3-2006-S	2" X 6"	14"	20"				4273	3000	5
WT3-2008-S	2" X 8"	16"	24"				4273	3000	6
WT3-2010-S	2" X 10"	18"	28"				4273	3000	7
WT3-2012-S	2" X 12"	20"	32"				4273	3000	8
WT3-2014-S	2" X 14"	22"	36"				4273	3000	9
WT3-2016-S	2" X 16"	24"	40"				4273	3000	10
WT3-2018-S	2" X 18"	26"	44"				4273	3000	10
WT3-2020-S	2" X 20"	28"	48"				4273	3000	11
WT3-2024-S	2" X 24"	32"	56"				3319	2300	12
WT3-2028-S	2" X 28"	36"	64"				2545	1700	14
WT3-2030-S	2" X 30"	38"	68"				2228	1500	15
WT3-2032-S	2" X 32"	40"	72"				2000	1400	15
WT3-2036-S	2" X 36"	44"	80"				1590	1100	17
WT3-2040-S	2" X 40"	48"	88"				1320	900	19
WT3-2042-S	2" X 42"	50"	92"				1228	800	20
WT3-2048-S	2" X 48"	56"	104"				955	600	22
WT3-2060-S	2" X 60"	68"	128"				637	400	26
WT3-2072-S	2" X 72"	80"	152"				410	300	31

*** NPT portlarında mevcuttur.

1 inç 25,4 mm'ye eşittir. $\text{mm} = \frac{\text{in}}{0.039370}$
 1 psi = 0.069 bar






HİDROLİK SİLİNDİR


TEKNİK ÖLÇÜLER									
PARÇA NUMARASI	SİL. ÇAP & STROKE	BOYUTLAR		MİL ÇAP	DIŞ ÖLÇÜSÜ	BAĞLANTI NOKTALARI	SİL. İTME KUVVETİ (KG)	BASINÇ (psi)	AĞIRLIK (kg)
		SİL. KAPALI	SİL. AÇIK						
WT3-2504-S	2.5" X 4"	12"	16"	1-3/8"	3/4"	SAE 8	6682	3000	6
WT3-2506-S	2.5" X 6"	14"	20"				6682	3000	7
WT3-2508-S	2.5" X 8"	16"	24"				6682	3000	8
WT3-2510-S	2.5" X 10"	18"	28"				6682	3000	9
WT3-2512-S	2.5" X 12"	20"	32"				6682	3000	10
WT3-2514-S	2.5" X 14"	22"	36"				6682	3000	11
WT3-2516-S	2.5" X 16"	24"	40"				6682	3000	12
WT3-2518-S	2.5" X 18"	26"	44"				6682	3000	13
WT3-2520-S	2.5" X 20"	28"	48"				6682	2900	14
WT3-2524-S	2.5" X 24"	32"	56"				4864	2100	16
WT3-2528-S	2.5" X 28"	36"	64"				3728	1600	18
WT3-2530-S	2.5" X 30"	38"	68"				3275	1400	19
WT3-2532-S	2.5" X 32"	40"	72"				2955	1300	20
WT3-2536-S	2.5" X 36"	44"	80"				2364	1000	21
WT3-2540-S	2.5" X 40"	48"	88"				1955	800	23
WT3-2542-S	2.5" X 42"	50"	92"				1773	800	24
WT3-2548-S	2.5" X 48"	56"	104"				1410	600	27
WT3-2560-S	2.5" X 60"	68"	128"				910	400	33
WT3-3006-S	3" X 6"	14"	20"	1-1/2"	1"	SAE 8	9636	3000	10
WT3-3008-S	3" X 8"	16"	24"				9636	3000	11
WT3-3010-S	3" X 10"	18"	28"				9636	3000	12
WT3-3012-S	3" X 12"	20"	32"				9636	3000	13
WT3-3014-S	3" X 14"	22"	36"				9636	3000	14
WT3-3016-S	3" X 16"	24"	40"				9636	3000	15
WT3-3018-S	3" X 18"	26"	44"				9636	3000	16
WT3-3020-S	3" X 20"	28"	48"				9410	2900	17
WT3-3024-S	3" X 24"	32"	56"				6910	2100	20
WT3-3028-S	3" X 28"	36"	64"				5273	1600	22
WT3-3030-S	3" X 30"	38"	68"				4682	1400	23
WT3-3032-S	3" X 32"	40"	72"				4182	1300	24
WT3-3036-S	3" X 36"	44"	80"				3364	1000	26
WT3-3040-S	3" X 40"	48"	88"				2773	800	29
WT3-3042-S	3" X 42"	50"	92"				2545	700	30
WT3-3048-S	3" X 48"	56"	104"				2000	600	33
WT3-3060-S	3" X 60"	68"	128"				1318	400	40

*** NPT portlarında mevcuttur.

1 inç 25,4 mm'ye eşittir. $\text{mm} = \frac{\text{in}}{0.039370}$
 1 psi = 0.069 bar





HİDROLİK SİLİNDİR

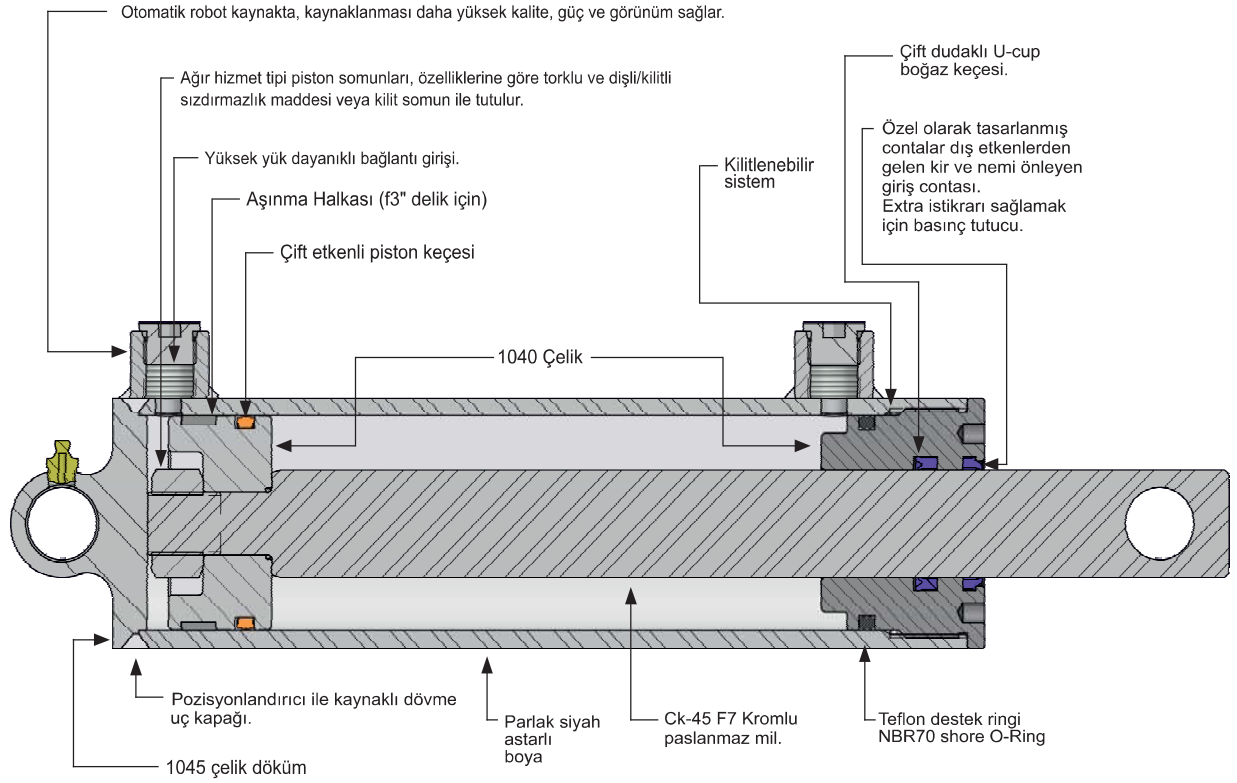

KEÇE SICAKLIK ARALIĞI : -30°C / +100°C (-22°F / +212°F)
KEÇE MAKSİMUM HIZI : 3 FT / SEC

TÜM KEÇELER BİRİNCİ SINIF, SİLİNDİRLER STATİK VE DİNAMİK BASINÇ TESTLERİNE UYGUN ÖZELLİKTEDİR.

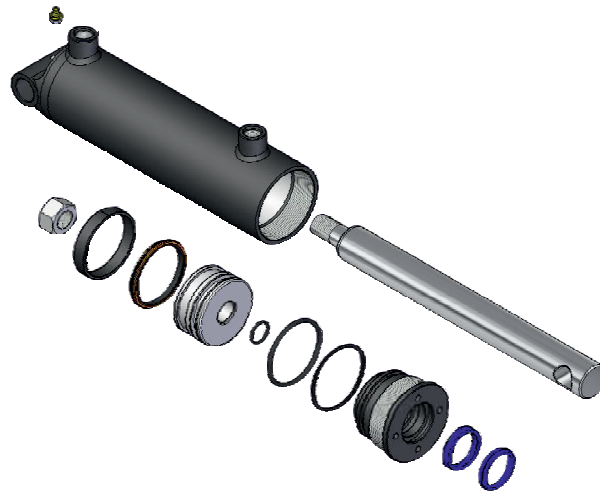


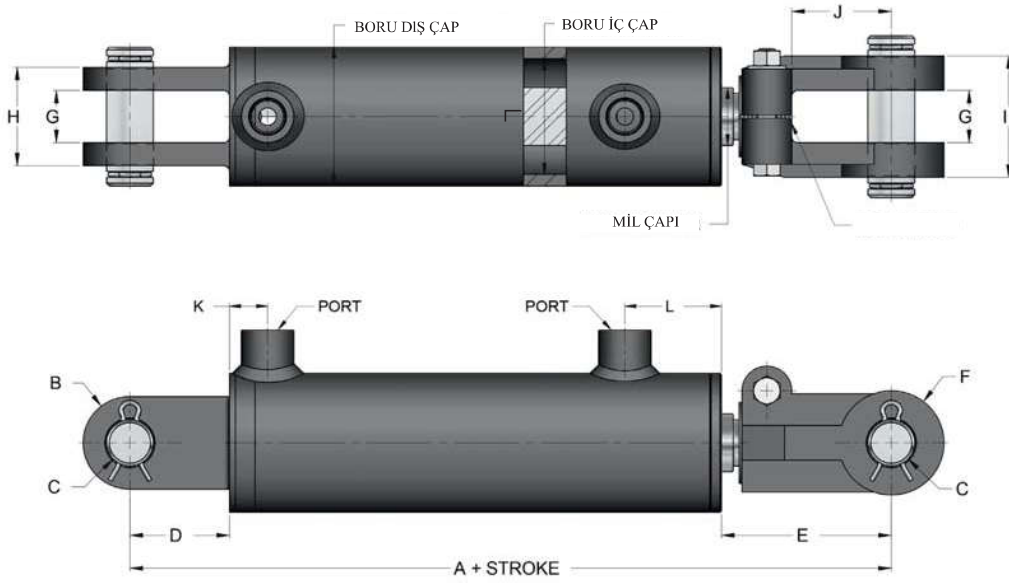


PARÇA NUMARASI	BORU İÇ ÇAP	BORU DIŞ ÇAP	MİL ÇAPI	MİL UCU	*A	B	C	D	*E	F	G	H	I	J	K	L	BAGLANTI NOKTALARI
TCL15XX-S	1.50"	1.875"	1.00"	0.875-14 UNF	10.25"	1.50"	0.76"	1.62"	4.50"	1.62"	0.87"	2.44"	2.00"	1.62"	0.93"	1.87"	SAE 6
TCL20XX-S	2.00"	2.375"	1.12"	1.125-12 UNF	10.25"	2.00"	1.01"	2.00"	3.62"	2.00"	1.14"	2.44"	2.50"	2.12"	0.81"	2.06"	SAE 8
TCL25XX-S	2.50"	2.875"	1.25"	1.125-12 UNF	10.25"	2.00"	1.01"	2.00"	3.62"	2.00"	1.14"	2.72"	2.72"	2.12"	0.81"	2.06"	SAE 8
TCL30XX-S	3.00"	3.50"	1.50"	1.250-12 UNF	10.25"	2.00"	1.01"	2.00"	3.62"	2.00"	1.14"	2.72"	2.72"	2.12"	0.87"	2.18"	SAE 8
TCL35XX-S	3.50"	4.00"	1.75"	1.500-12 UNF	10.25"	2.00"	1.01"	2.00"	3.62"	2.00"	1.14"	2.72"	2.72"	2.12"	0.93"	2.18"	SAE 8
TCL40XX-S	4.00"	4.50"	2.00"	1.500-12 UNF	10.25"	2.00"	1.01"	2.12"	3.62"	2.00"	1.14"	2.72"	2.95"	2.12"	1.00"	2.18"	SAE 8

1 inç 2,54 mm'ye eşittir. $\text{mm} = \frac{\text{in}}{0.039370}$
 1 psi = 0.069 bar

** NPT PORT MEVCUTTUR.



HİDROLİK SİLİNDİR




TEKNİK ÖLÇÜLER

PARÇA NUMARASI	SİL. ÇAP & STROKE	BOYUTLAR		MİL ÇAP	DIŞ ÖLÇÜSÜ	BAĞLANTI NOKTALARI	SİL. İTME KUVVETİ (KG)	BASINÇ (psi)	AĞIRLIK (kg)
		SİL. KAPALI	SİL. AÇIK						
TCL1504-S	1.5" X 4"	14-1/4"	18-1/4"	1"	3/4"	SAE 6	2410	3000	5
TCL1506-S	1.5" X 6"	16-1/4"	22-1/4"				2410	3000	5
TCL1508-S	1.5" X 8"	18-1/4"	26-1/4"				2410	3000	5
TCL1508-ASAE*	1.5" X 8"	20-1/4"	28-1/4"				2410	3000	6
TCL1510-S	1.5" X 10"	20-1/4"	30-1/4"				2410	3000	6
TCL1512-S	1.5" X 12"	22-1/4"	34-1/4"				2410	3000	7
TCL1514-S	1.5" X 14"	24-1/4"	38-1/4"				2410	3000	7
TCL1516-S	1.5" X 16"	26-1/4"	42-1/4"				2364	2900	8
TCL1518-S	1.5" X 18"	28-1/4"	46-1/4"				2000	2400	8
TCL1520-S	1.5" X 20"	30-1/4"	50-1/4"				3700	2100	9
TCL1524-S	1.5" X 24"	34-1/4"	58-1/4"				1682	1500	10
TCL1528-S	1.5" X 28"	38-1/4"	66-1/4"				954	1200	11
TCL1530-S	1.5" X 30"	40-1/4"	70-1/4"				864	1000	12
TCL1532-S	1.5" X 32"	42-1/4"	74-1/4"				773	900	12
TCL1534-S	1.5" X 34"	44-1/4"	78-1/4"				682	800	13
TCL1536-S	1.5" X 36"	46-1/4"	82-1/4"				591	700	13
TCL2004-S	2" X 4"	14-1/4"	18-1/4"	1-1/8"	1"	SAE 8	4273	3000	7
TCL2006-S	2" X 6"	16-1/4"	22-1/4"				4273	3000	8
TCL2008-S	2" X 8"	18-1/4"	26-1/4"				4273	3000	9
TCL2008-ASAE*	2" X 8"	20-1/4"	28-1/4"				4273	3000	9
TCL2010-S	2" X 10"	20-1/4"	30-1/4"				4273	3000	9
TCL2012-S	2" X 12"	22-1/4"	34-1/4"				4273	3000	10
TCL2014-S	2" X 14"	24-1/4"	38-1/4"				4273	3000	10
TCL2016-S	2" X 16"	26-1/4"	42-1/4"				3818	2600	11
TCL2018-S	2" X 18"	28-1/4"	46-1/4"				3182	2200	12
TCL2020-S	2" X 20"	30-1/4"	50-1/4"				2682	1900	13
TCL2024-S	2" X 24"	34-1/4"	58-1/4"				2000	1400	14
TCL2030-S	2" X 30"	40-1/4"	70-1/4"				1364	900	16
TCL2036-S	2" X 36"	46-1/4"	82-1/4"				1000	700	19
TCL2504-S	2.5" X 4"	14-1/4"	18-1/4"	1-1/4"	1"	SAE 8	6682	3000	9
TCL2506-S	2.5" X 6"	16-1/4"	22-1/4"				6682	3000	9
TCL2508-S	2.5" X 8"	18-1/4"	26-1/4"				6682	3000	10
TCL2508-ASAE*	2.5" X 8"	20-1/4"	28-1/4"				6682	3000	10
TCL2510-S	2.5" X 10"	20-1/4"	30-1/4"				6682	3000	11
TCL2512-S	2.5" X 12"	22-1/4"	34-1/4"				6682	3000	12
TCL2514-S	2.5" X 14"	24-1/4"	38-1/4"				6682	3000	13
TCL2516-S	2.5" X 16"	26-1/4"	42-1/4"				5819	2600	14
TCL2518-S	2.5" X 18"	28-1/4"	46-1/4"				4864	2100	15
TCL2520-S	2.5" X 20"	30-1/4"	50-1/4"				4137	1800	15
TCL2524-S	2.5" X 24"	34-1/4"	58-1/4"				3045	1300	17
TCL2530-S	2.5" X 30"	40-1/4"	70-1/4"				2091	900	20
TCL2536-S	2.5" X 36"	46-1/4"	82-1/4"				1545	600	22

*** NPT portlarda mevcuttur.



1 inç 2,54 mm'ye eşittir. $mm = \frac{in}{0.039370}$
1 psi = 0.069 bar



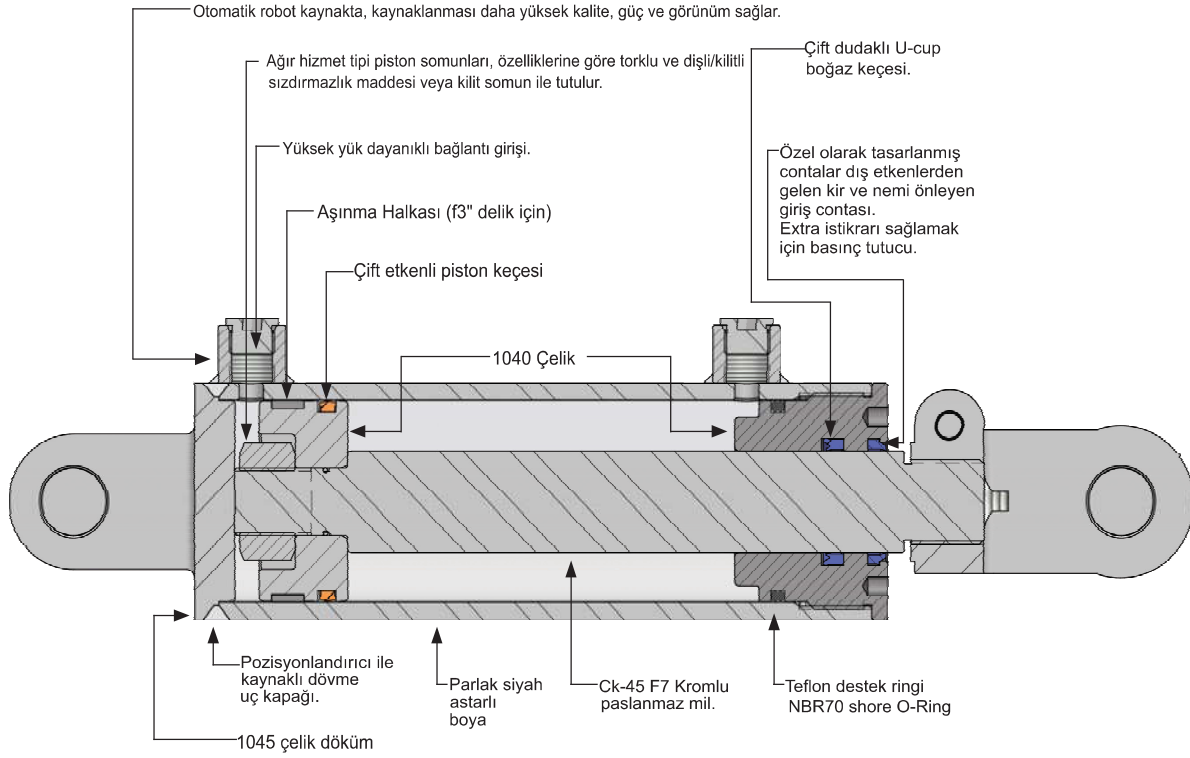


KEÇE SICAKLIK ARALIĞI : -30°C / +100°C (-22°F / +212°F)
KEÇE MAKSİMUM HIZI : 3 FT / SEC

TÜM KEÇELER BİRİNCİ SINIF, SİLİNDİRLER STATİK VE DİNAMİK BASINÇ TESTLERİNE UYGUN ÖZELLİKTEDİR.

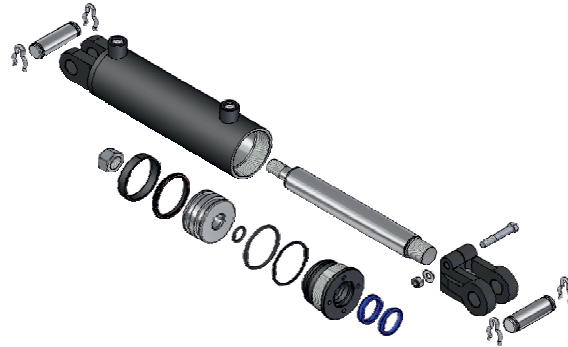

HİDROLİK SİLİNDİR

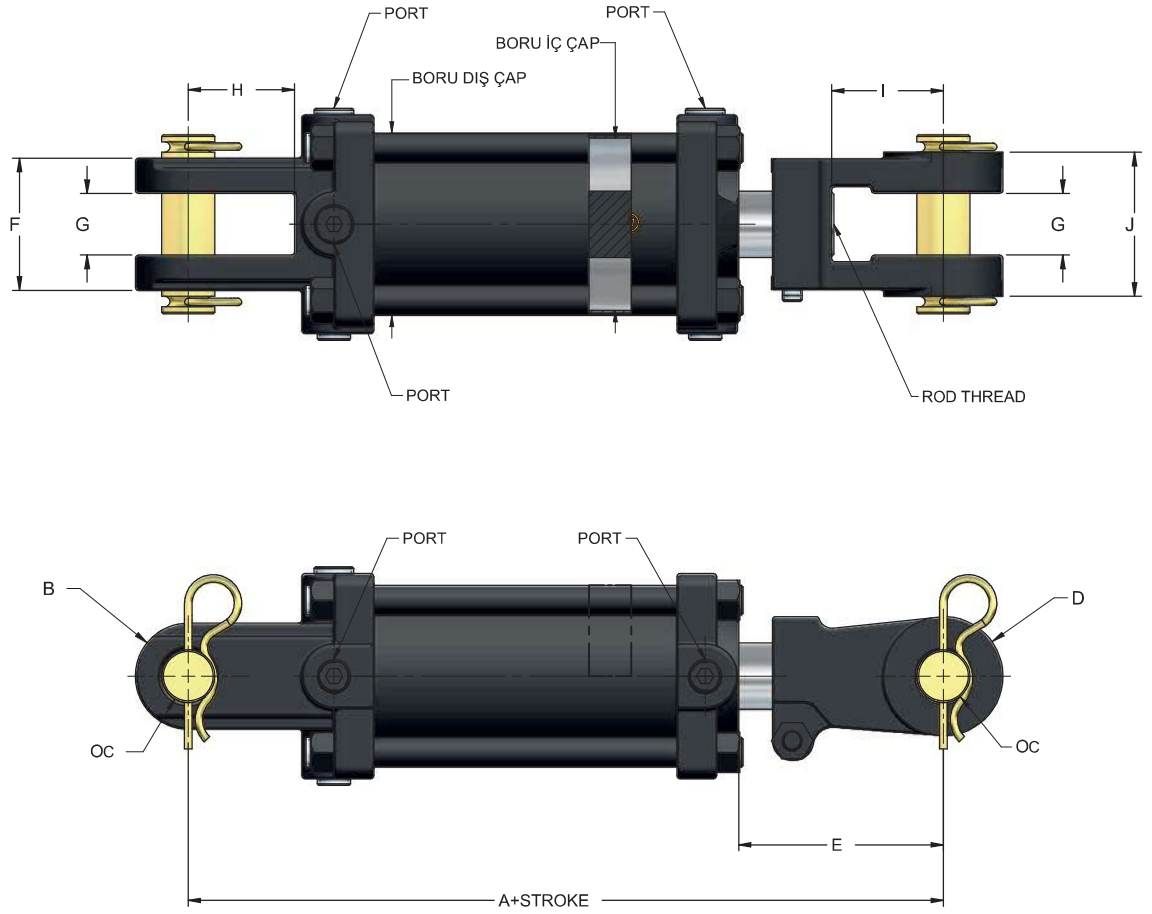

PARÇA NUMARASI	BORU İÇ ÇAP	BORU DIŞ ÇAP	MİL ÇAPI	A2	B	C3	D4	E5	F	G	H	I	J4	BAĞLANTI NOKTALARI
TR2.5-20-LA4	2.00"	2.38"	1.125-12 UNF	10.25"	2.00"	1.01"	2.00"	4.17"	2.44"	1.14"	2.00"	2.12"	2.50"	3/8 NPT & SAE 8
TR2.5-25-LA4	2.50"	2.89"	1.125-12 UNF	10.25"	2.00"	1.01"	2.00"	4.17"	2.44"	1.14"	2.00"	2.12"	2.50"	3/8 NPT & SAE 8
TR2.5-30-LA4	3.00"	3.39"	1.25-12 UNF	10.25"	2.00"	1.01"	2.00"	4.14"	2.72"	1.14"	2.00"	2.12"	2.72"	1/2 NPT & SAE 8
TR2.5-35-LA4	3.50"	3.87"	1.25-12 UNF	10.25"	2.00"	1.01"	2.00"	4.09"	2.72"	1.14"	2.00"	2.12"	2.72"	1/2 NPT & SAE 8
TR2.5-40-LA4	4.00"	4.50"	1.25-12 UNF	10.25"	2.00"	1.01"	2.00"	3.82"	2.72"	1.14"	2.12"	2.12"	2.72"	1/2 NPT & SAE 8
TR2.5-50-LA4	5.00"	5.50"	1.500-12 UNF	12.25"	2.75"	1.26"	2.75"	5.00"	2.87"	1.25"	2.12"	2.12"	2.95"	1/2 NPT & SAE 10

1 inç 2,54 mm'ye eşittir. $mm = \frac{in}{0.039370}$
 1 psi = 0.069 bar





HAKBAY

HİDROLİK - PNÖMATİK



**YENİ !
PORT ENTEGRASYONLU...
Zaman Kazanın..**

**Tek bir silindir tüm ihtiyaçlarınız karşıladığında,
neden envanteriniz iki katına çıkmasın?**

**Daha iyi çözümler için
birlikte çalışmaya varız...**

www.hakbay.com